

AIRMAC



Premium quality blower packages through innovative design and superior construction.

TTD Series Blower Packages




Air Mac

TTD SERIES BLOWER PACKAGES

TTD Series (Table Top Direct Drive) rotary lobe blower packages feature DuroFlow blowers with flows to 670 CFM, and pressures to 15 PSIG for bulk transfer of dry materials.



1. Heavy-duty reinforced single piece cast iron cylinder
2. Solid rotor profile precision machined with advanced CNC technology
3. Innovative rotor tip increases blower efficiency
4. Advanced piston ring and flinger oil and air seal design for leak free operation
5. Oversized drive end double-row ball bearings
6. Helical timing gears, precision machined from alloy steel forging & spline mounted
7. Dual sump reliable splash lubrication

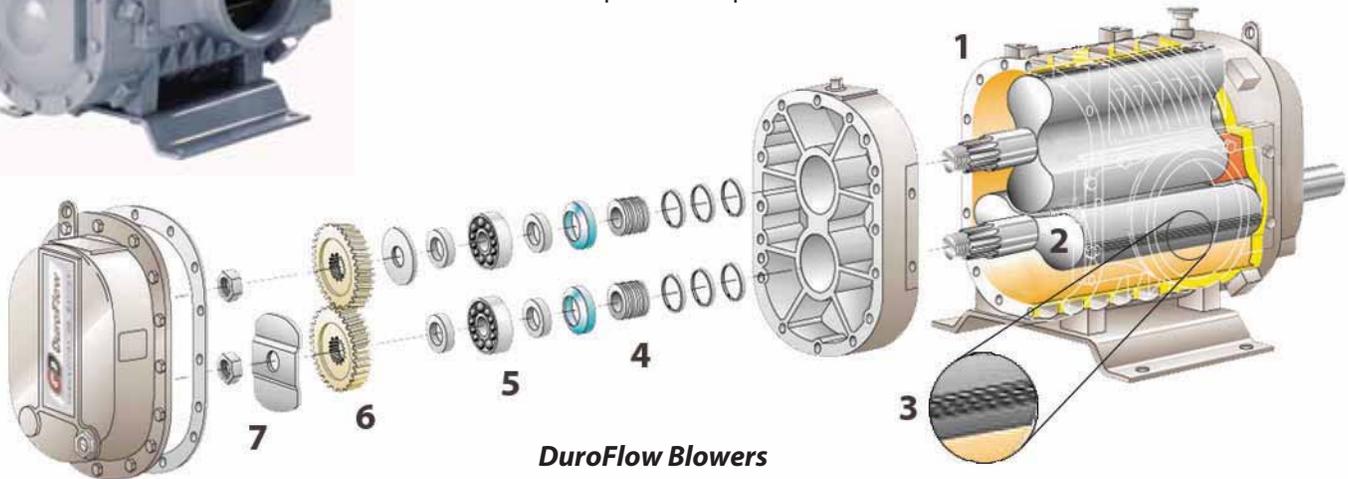

DuroFlow Blowers

Transfer systems using pneumatic power are an efficient method of conveying a wide variety of dry bulk materials. A transfer system uses a rotary valve to feed material to the conveying line, which transfers it to the process.

Un-loader system empties rail cars and tank trucks by pressurizing the tank on one side and supplying air to the product discharge line forcing material out on the other side.

MODEL	HP	CFM	PSIG	Tons / hr *
TTD-4504-30	30	285	15	8 to 14
TTD-4506-50	50	450	15	18-25
TTD-4509-60	60	670	15	24 to 45
TTD-4512-75	75	920	15	45 to 57

*Tons/hr is only a general guideline based on a “typical” conveying system with the following criteria: Dry materials with a bulk density of 90 lbs/cu.ft. Conveyed through a 3” to 5” ID line with a maximum total length of 100’ with no more than a 70’ vertical rise. Sizing assumes proper material feed to the conveying line and a piping system design with no more than four 90 degree turns, a minimum of flexible hose lengths following good design and construction practices. These capacities are guidelines only since material characteristics, altitude, temperature, moisture level, and air leakage vary from site to site.

TTD SERIES BLOWER PACKAGES

Table Top Base

The “Table Top” design features a heavy duty structural steel frame which provides a ridged mounting platform for the blower, motor and drive.

Discharge Silencer

A chambered reactive/absorptive discharge silencer reduces the noise and pulsation energy generated by the blower. The all welded steel silencer is positioned as close to the blower connection as possible to maximize the effectiveness.

Inlet Filter Silencer

A combination inlet silencer filter incorporates multiple silencing tubes around the outside of the base and a central tubular steel acoustic section layered with absorptive media for maximum attenuation. In addition the weatherproof hood is lined with a “quiet band” of sound deadening barrier material. A dry type replaceable element removes 99% of particles 2 micron and larger.

Direct Coupled Drive

The flexible coupling features molded, non-lubricated, interchangeable elastomeric EPDM sleeves. Its four-way flexing action accommodates torsional, angular, and parallel misalignment, as well as axial end float.

Relief Valve

The relief valve is rated for the full capacity of the blower. With a diaphragm assist spring loaded design the valve maintains repeatable set pressures after numerous cycles and remains tight till it reaches “cracking” pressure. Most importantly the valve consistently re-sets below set pressure and does not flutter.



Standard Equipment

- Positive displacement rotary blower
- Synthetic lubricant fill and level gauge
- Drive motor 208-230-460/3/60 1.15 SF TEFC
- Direct drive coupling with enclosed guard
- Oversized inlet silencer filter combination
- Full flow pressure relief valve
- Pressure Gauge, SS, liquid filled
- Combination Base /Discharge silencer, chambered reactive/absorptive with lifting eyes
- Flexible connector between blower & silencer
- Drawings, instruction & operating manuals



Inlet Filter Silencer



Discharge Silencer



Direct Drive Coupling



Relief Valve



Airmac, founded on the principle of offering superior blower packages, has a history of innovation and excellence that sets standards for the industry. For twenty years Unimac LP has supplied blower packages on an international scope, with installations in the Middle East, Central and South America, Indonesia and the United States.

Our 16,000 sq. ft. shop is located on over an acre with an overhead crane, welding shop, metal-cutting saws and paint booth. A 600-amp test stand allows full load testing up to 250 HP and a VFD drive allows testing with 50 Hz power, common for international voltages.

Products are designed using Autodesk INVENTOR 2012, and manufactured in house, adhering to standardized quality control procedures. Critical steps in the fabrication process such as cutting, welding, piping, wiring and painting are performed by fabricator-welders, mechanics and technicians experienced in their craft with a proven track record of success in producing quality equipment. The end result is a consistent level of high quality that ships on time and performs as expected.

Pre-designed packages range from bare bones "Base Mounted" to "Quiet Enclosed" for maximum noise attenuation. By standardizing our designs we can streamline the whole manufacturing process, providing an excellent value with faster delivery. Our products incorporate innovative design concepts with added features to improve reliability, extend useful life, and make routine service easier. Attention to detail and an exceptional level of construction quality are evident throughout our products.

Sizes from 1 to 27,000 CFM • Pressures to 40 PSI • Vacuum to 27" Hg • Combined Pressure-Vacuum



Base Mounted



Table Top



Clam Shell



Quiet Enclosed



Gas Booster

12411 Astoria Blvd,
Houston TX 77089
281-922-5800

8901 Directors Row
Dallas TX 75247
866-424-7622

81104 SE 59th
Oklahoma City, OK 73129
405-632-2510