

## Membrane Compressed Air Dryers

HMD SERIES



# HMD Series Membrane Dryers

## Dedicated to Excellence

Since 1948, compressed air users around the world have relied on Hankison to provide innovative compressed air treatment solutions for critical applications. Hankison maintains a long standing reputation for manufacturing products that deliver superior performance, time proven reliability and optimal energy savings. Hankison today is the preferred choice for providing clean, dry compressed air for the most challenging industries.

Based in Charlotte, North Carolina, SPX FLOW is a leading global supplier of highly engineered flow components, process equipment and turn-key systems, along with the related aftermarket parts and services, into the food and beverage, power and energy and industrial end markets. SPX FLOW has more than \$2 billion in annual revenues and approximately 8,000 employees with operations in over 35 countries and sales in over 150 countries around the world. To learn more about SPX FLOW, please visit our website at [www.spxflow.com](http://www.spxflow.com)

## THE NEXT GENERATION IN MEMBRANE TECHNOLOGY

Advancements in design allow membrane technology to efficiently dehydrate compressed air. Versatile, environmentally and user-friendly, membrane dryers are the ideal solution for low flow and point of use applications.

### Versatile

- Lightweight—can be installed without additional support
- Operates in both horizontal and vertical orientation
- Convenient mounting systems available
- High inlet and outlet flows
- Dryers may be sized to produce dew point temperatures from -40°F (-40°C) or below to +50°F (+10°C)

### Efficient

- Low sweep air rates — more air available downstream
- Choice of Prefilter packages:
  - » *HF Series Grade 5 high efficiency oil removal filter for normal applications*
  - » *HF Series Grade 7 air inlet filter and Grade 3 ultra high efficiency oil removal filter for critical applications*

### Low Maintenance

- No power source required
- No moving parts to maintain, repair or wear out
- No consumables to replace
- No liquid condensate to dispose of

### Drying Protection

- Pressurized air is contained inside the membranes
- Housing contains air at atmospheric pressure
- No oil/water emulsions or chemicals to dispose of

### Durable Construction

- Maximum working pressure for all models: 175 psig (12.3 kg/cm<sup>2</sup>)
- Maximum inlet temperature: 150°F (66°C)

### 3 YEAR WARRANTY


Standard one year warranty is extended to three years when the dryer is installed with an optional prefilter package. To keep the warranty in effect, cartridges must be replaced at six month intervals and the drain mechanism yearly.

\* Fitness Guarantee

If during the first three months of operation, you are not satisfied with the suitability of the membrane dryer for your application, return the dryer for full credit. The credit can be applied to the purchase of any other Hankison drying equipment.



## How it Works

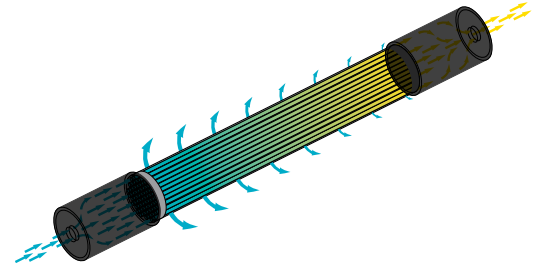

Compressed air, saturated with water vapor, flows through a bundle of tube-shaped hollow membrane fibers. A sweep orifice installed at the end of the bundle meters the amount of sweep air required to remove the water vapor from the dryer. Dry air then exits the tube bundle for use downstream. As long as the dried air isn't exposed to temperatures below the specified pressure dew point, no troublesome liquid water will form in the air system.



# HMD Series Specifications

**Inlet/Outlet Flow Capacities** scfm (nm<sup>3</sup>/h) @ 100 psig (kg/cm<sup>2</sup>)<sup>3</sup>

	INLET TEMP		FLOW	OUTLET PRESSURE DEW POINT					
				50°F	40°F	20°F	0°F	-20°F	-40°F
	°F	°C	10°C	4.4°C	-6.7°C	-17.8°C	-29°C	-40°C	
HMD20-1	40	4.4	In				1.57	1.13	0.85
			Out				1.36	0.92	0.64
	60	16	In			1.73	1.24	0.94	0.72
			Out			1.52	1.03	0.73	0.51
	80	27	In		1.88	1.37	1.04	0.81	0.63
			Out		1.67	1.16	0.83	0.60	0.42
	100	38	In	1.70	1.48	1.14	0.89	0.70	0.55
			Out	1.49	1.27	0.93	0.68	0.49	0.34
	120	49	In	1.39	1.24	0.99	0.79	0.62	0.49
			Out	1.18	1.03	0.78	0.58	0.41	0.28
	150	66	In	1.11	1.01	0.82	0.67	0.53	0.43
			Out	0.90	0.80	0.61	0.46	0.32	0.22
HMD20-2	40	4.4	In				6.04	4.32	3.22
			Out				5.22	3.50	2.40
	60	16	In			6.68	4.76	3.58	2.73
			Out			5.86	3.94	2.76	1.91
	80	27	In		7.27	5.24	3.96	3.05	2.36
			Out		6.45	4.42	3.14	2.23	1.54
	100	38	In	6.55	5.69	4.37	3.40	2.66	2.08
			Out	5.73	4.87	3.55	2.58	1.84	1.26
	120	49	In	5.33	4.76	3.77	2.98	2.36	1.86
			Out	4.51	3.94	2.95	2.16	1.54	1.04
	150	66	In	4.25	3.86	3.13	2.51	2.01	1.60
			Out	3.43	3.04	2.31	1.69	1.19	0.78
HMD20-3	40	4.4	In				9.51	7.17	5.62
			Out				8.31	5.97	4.42
	60	16	In			10.36	7.78	6.14	4.90
			Out			9.16	6.58	4.94	3.70
	80	27	In		11.17	8.43	6.67	5.39	4.35
			Out		9.97	7.23	5.47	4.19	3.15
	100	38	In	10.19	9.04	7.24	5.88	4.81	3.92
			Out	8.99	7.84	6.04	4.68	3.61	2.72
	120	49	In	8.55	7.77	6.40	5.28	4.35	3.57
			Out	7.35	6.57	5.20	4.08	3.15	2.37
	150	66	In	7.08	6.53	5.49	4.59	3.81	3.15
			Out	5.88	5.33	4.29	3.39	2.61	1.95

1 Use inlet air temperature if the air entering the dryer has not been dried upstream (air is saturated). If air has been dried. (e.g. in a refrigerated dryer) use the dew point temperature of the inlet air.

2 Models HMD20-7, 8, and 9 for higher flows are available. Model HMD20-7 is three HMD20-5s piped in parallel. Multiply flows found in HMD20-5 table by 3 to determine capacity.

Model HMD20-8 is two HMD20-6s, and HMD20-9 is three HMD20-6s piped in parallel. Multiply flows in HMD20-6 table by 2 or 3 to find flow capacity.

3 Flow capacities at 100 psig (7 kg/cm<sup>2</sup>). For capacities at other pressures consult factory. Capacities are established in accordance with CAGI (Compressed Air and Gas Institute) Standard ADF 700: Membrane Compressed Air Dryers - Methods for Testing and Rating.

# HMD Series Specifications

**Inlet/Outlet Flow Capacities** scfm (nm<sup>3</sup>/h) @ 100 psig (kg/cm<sup>2</sup>)<sup>3</sup>

	INLET TEMP		FLOW	OUTLET PRESSURE DEW POINT					
				50°F	40°F	20°F	0°F	-20°F	-40°F
	°F	°C		10°C	4.4°C	-6.7°C	-17.8°C	-29°C	-40°C
HMD20-4	40	4.4	In				20.5	15.9	12.8
			Out				18.0	13.4	10.3
	60	16	In			22.2	17.1	13.8	11.3
			Out			19.7	14.6	11.3	8.8
	80	27	In		23.8	18.3	14.9	12.3	10.2
			Out		21.3	15.8	12.4	9.8	7.7
	100	38	In	21.8	19.5	16.0	13.3	11.1	9.3
			Out	19.3	17.0	13.5	10.8	8.6	6.8
	120	49	In	18.6	17.0	14.3	12.1	10.2	8.6
			Out	16.1	14.5	11.8	9.6	7.7	6.1
	150	66	In	15.7	14.6	12.5	10.7	9.1	7.7
			Out	13.2	12.1	10.0	8.2	6.6	5.2
HMD20-5	40	4.4	In				34	26.2	20.9
			Out				29.8	22	16.7
	60	16	In			36.9	28.2	22.6	18.4
			Out			32.7	24	18.4	14.2
	80	27	In		39.7	30.4	24.5	20.1	16.5
			Out		35.5	26.2	20.3	15.9	12.3
	100	38	In	36.3	32.4	26.4	21.8	18.1	15
			Out	32.1	28.2	22.2	17.6	13.9	10.8
	120	49	In	30.8	28.2	23.6	19.7	16.5	13.7
			Out	26.6	24	19.4	15.5	12.3	9.5
	150	66	In	25.8	24	20.5	17.3	14.6	12.2
			Out	21.6	19.8	16.3	13.1	10.4	8
HMD20-6	40	4.4	In				66.4	51	40.7
			Out				58.2	42.8	32.5
	60	16	In			72	55	44.1	35.8
			Out			63.8	46.8	35.9	27.6
	80	27	In		77.4	59.3	47.7	39.1	32.1
			Out		69.2	51.1	39.5	30.9	23.9
	100	38	In	70.8	63.3	51.4	42.4	35.2	29.1
			Out	62.6	55.1	43.2	34.2	27	20.9
	120	49	In	60.1	54.9	45.9	38.4	32.1	26.7
			Out	51.9	46.7	37.7	30.2	23.9	18.5
	150	66	In	50.3	46.7	39.8	33.7	28.4	23.8
			Out	42.1	38.5	31.6	25.5	20.2	15.6

- 1 Use inlet air temperature if the air entering the dryer has not been dried upstream (air is saturated). If air has been dried. (e.g. in a refrigerated dryer) use the dew point temperature of the inlet air.
- 2 Models HMD20-7, 8, and 9 for higher flows are available. Model HMD20-7 is three HMD20-5s piped in parallel. Multiply flows found in HMD20-5 table by 3 to determine capacity.  
Model HMD20-8 is two HMD20-6s, and HMD20-9 is three HMD20-6s piped in parallel. Multiply flows in HMD20-6 table by 2 or 3 to find flow capacity.
- 3 Flow capacities at 100 psig (7 kg/cm<sup>2</sup>). For capacities at other pressures consult factory. Capacities are established in accordance with CAGI (Compressed Air and Gas Institute) Standard ADF 700: Membrane Compressed Air Dryers - Methods for Testing and Rating.

# HMD Series Specifications

**Inlet/Outlet Flow Capacities** scfm (nm<sup>3</sup>/h) @ 100 psig (kg/cm<sup>2</sup>)<sup>3</sup>

INLET TEMP		FLOW	OUTLET PRESSURE DEW POINT					
			40°F 4.4°C	20°F -6.7°C	0°F -17.8°C	-20°F -29°C	-40°F -40°C	
°F	°C							
RHD016SS	40	4.4	In		27.7	17.1	13.1	10.9
			Out		24.3	13.7	9.7	7.5
	60	16	In	28.8	18.7	14.1	11.7	10.1
			Out	25.4	15.3	10.7	8.3	6.7
	80	27	In	20.4	15.1	12.4	10.7	9.5
			Out	17	11.8	9	7.3	6.1
	100	38	In	16.3	13.3	11.3	10	9
			Out	12.9	9.9	7.9	6.6	5.6
	120	49	In	14.2	12.1	10.6	9.5	8.6
			Out	10.8	8.7	7.2	6.1	5.2
RHD026SS	40	4.4	In		47	29	22.2	18.5
			Out		41.3	23.3	16.5	12.8
	60	16	In	48.9	31.7	23.9	19.8	17.1
			Out	43.2	26	18.2	14.1	11.4
	80	27	In	34.6	25.8	21	18.1	16.1
			Out	28.9	20.1	15.3	12.4	10.4
	100	38	In	27.6	22.5	19.1	16.9	15.2
			Out	21.9	16.8	13.4	11.2	9.5
	120	49	In	24.1	20.5	17.9	16.1	14.5
			Out	18.4	14.8	12.2	10.4	8.8
RHD052SS	40	4.4	In		94	58	44.4	37
			Out		82.6	48.6	33	25.6
	60	16	In	97.8	63.4	47.8	39.6	34.2
			Out	86.4	52	36.4	28.2	22.8
	80	27	In	69.2	51.6	42	36	32.2
			Out	57.8	40.2	30.6	24.8	20.8
	100	38	In	55.2	45	38.2	33.8	30.4
			Out	43.8	33.6	26.8	22.4	19
	120	49	In	48.2	41	35.8	32.2	29
			Out	36.8	29.6	24.4	20.8	17.6

1 Use inlet air temperature if the air entering the dryer has not been dried upstream (air is saturated). If air has been dried. (e.g. in a refrigerated dryer) use the dew point temperature of the inlet air.

2 Models HMD20-7, 8, and 9 for higher flows are available. Model HMD20-7 is three HMD20-5s piped in parallel. Multiply flows found in HMD20-5 table by 3 to determine capacity.

Model HMD20-8 is two HMD20-6s, and HMD20-9 is three HMD20-6s piped in parallel. Multiply flows in HMD20-6 table by 2 or 3 to find flow capacity.

3 Flow capacities at 100 psig (7 kg/cm<sup>2</sup>). For capacities at other pressures consult factory. Capacities are established in accordance with CAGI (Compressed Air and Gas Institute) Standard ADF 700: Membrane Compressed Air Dryers - Methods for Testing and Rating.

# HMD Series Product Specifications

MODEL	DIMENSIONS				IN/OUT <sup>2</sup> CONN.		WEIGHT		MAX. WORKING PRESSURE	MAX. OPERATING TEMP.
	L		W		IN	MM	LBS	KG		
	IN	MM	IN	MM	IN	MM				
<b>HMD20-2</b>	26.4	671	2.5	63.5	0.4	10.2	1.8	0.8	175 psig (12.3 kg/cm <sup>2</sup> )	150°F (66°C)
<b>HMD20-3</b>	15.3	389	4.2	106.7	0.4	10.2	4.9	2.2		
<b>HMD20-4</b>	26.9	683	4.2	106.7	0.5	12.7	6.9	3.1		
<b>HMD20-5</b>	41	1,041	4.2	106.7	0.5	12.7	9.5	4.3		
<b>HMD20-6</b>	41.1	1,044	5.3	134.6	0.8	20.3	14.6	6.6		
<b>HMD20-7<sup>1</sup></b>	52	1,321	19.3	490	1	25.4	30	13.6		
<b>HMD20-8<sup>1</sup></b>	52	1,321	12	305	1	25.4	30.7	13.9		
<b>HMD20-9<sup>1</sup></b>	52	1,321	21.5	546	1	25.4	45	20.4		
<b>RHD016SS</b>	26.9	683	4.2	106.7	0.5	12.7	6.9	3.1		
<b>RHD026SS</b>	41	1,041	4.2	106.7	0.5	12.7	9.5	4.3		
<b>RHD052SS</b>	41.1	1,044	5.3	134.6	0.8	20.3	14.6	6.6		

<sup>1</sup> Models HMD20-7, 8, and 9 for higher flows are available. Model HMD20-7 is three HMD20-5s piped in parallel. Multiply flows found in HMD20-5 table by 3 to determine capacity.

<sup>2</sup> Specify NPT or BSP

## MATERIALS OF CONSTRUCTION

MODELS	END CAPS	SHELL	INLET/OUTLET FITTINGS
<b>HMD20-1 through HMD20-5</b>	Nylon	CPVC	Brass
<b>HMD20-6</b>	Aluminum	CPVC	Aluminum*
<b>HMD20-4SS through HMD20-6SS</b>	304SS	304SS	304SS*



## Global locations

### SPXFLOW USA

#### Hankison Headquarters

4647 SW 40th Avenue  
Ocala, Florida 34474-5788 U.S.A.  
P: (724) 745-1555  
F: (724) 745-6040

#### Hankison Rental Northeast

100 Commerce Drive, Suite 40  
Washington, PA 15301  
P: (724) 225-1470  
F: (724) 222-1317

#### Hankison Rental Southwest

1486 Champion Drive  
Terrell, TX 75160 U.S.A.  
P: (800) 379-3711  
F: (972) 563-9991

### SPX Canada

#### Hankison Canada

1415 California Avenue  
Brockville, ON, Canada k6v 7h7  
P: (800) 267-3884  
F: (800) 318-0952

### SPX FLOW Mexico

#### Hankison Mexico

Avenida Constitución #2165 -B  
Colonia Julián Carrillo  
San Luis Potosí, S.L.P.  
C.P. 78250 México  
P: +52 (444) 815-7074  
F: +52 (444) 815-8295

### SPX South America

#### Hankison Brazil

Rua Joao Daprat, 231 b  
09600-010-SÃO Bernardo Do Campo, SP  
Brazil  
P: +55 (11) 2166-4050  
F: +55 (11) 2166-4070

### Hankison Germany

Konrad-Zuse-Str. 25  
D-47445 Moers Germany  
P: (+49) 2841-8190  
F: (+49) 2841-87112

### SPX FLOW India

SPX India PVT, LTD  
Manufacturing G-72/73  
Riico Industrial Area  
Mansarovar, RAJASTHAN  
Jaipur 302 020  
India  
P: (+91) 141-2396759  
F: (+91) 141-2395048

### SPX FLOW Asia Pacific

#### SPX SLOW China

5th Floor, Park Center,  
No.1568 Huashan Road, Shanghai China  
P: +86 (021) 2208-5840  
F: +86 (021) 2208-5866

### SPX FLOW Korea

#940-1 Yerim-Ri  
Jeonggwan-Myeon  
Gijang-Gun, Busan, Rep. of Korea  
P: +82 (51) 728-5360  
F: +82 (51) 728-5359

### SPX FLOW

4647 SW 40th Avenue  
Ocala, Florida 34474-5788 U.S.A.  
P: (724) 745-1555  
F: (724) 745-6040  
E: [hankison.americas@spxflow.com](mailto:hankison.americas@spxflow.com)  
[www.spxflow.com/hankison](http://www.spxflow.com/hankison)

SPX FLOW, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation.

Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information visit [www.spxflow.com](http://www.spxflow.com).

The green "S" and "X" are trademarks of SPX FLOW, Inc.

Bulletin: HMD\_NA Version: 08/2016 Issued: 08/2016

COPYRIGHT © 2016 SPX FLOW INC.